

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

PCT / SE 2004 / 001358

REC'D 1 OCT 2004

WIPO

PCT

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande  
Applicant

Telefonaktiebolaget L M Ericsson (publ)  
Stockholm SE,  
Larsson Peter Solna SE,  
Signell Svante Vällingby SE,  
Astely David Stockholm SE

(81) Designerade stater  
Designated states

AP: all, AE, AL, AM, AT, AU, AZ, BA, BB, BG,  
BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ,  
DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LI, LK, LR, LS, LT, LU,  
LV, MA, MD, MG, MK, MN, MW, MX, NZ, NI, NO,  
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(21) Patentansökningsnummer PCT SE03/02058  
Patent application number

(86) Ingivningsdatum 2003-12-19  
Date of filing

Stockholm, 2004-09-28

För Patent- och registreringsverket  
For the Patent- and Registration Office

Görel Gustafsson

Avgift  
Fee

170:-

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

19-12-2003

1

## Method and Apparatus in a MIMO Based Communication System

### Technical Field

The present invention relates to communication systems using multiple transmit antennas and receivers using multiple antennas.

### Background and Prior Art

Solutions involving Multiple Input Multiple Output (MIMO) antenna configurations, in which both the transmitter and the receiver have multiple antennas, are being considered for use in wireless communications networks to improve system performance in terms of peak data rate, system coverage and capacity.

In the general case, in such a system, both the transmitter and the receiver have multiple antennas. This results in a number of possible radio channels, between each transmitter and receiver antenna. A channel matrix  $H$  can be defined to characterize all the channels. If  $N$  transmit antennas and  $M$  receive antennas are used the size of the channel matrix  $H$  will be  $M \times N$ .  $H$  generally varies over time.

In the case when the channel is known to the receiver but not to the transmitter, data is transmitted uniformly in all directions, and the channel capacity can be expressed as

$$c = \lg_2 \left( \det \left( I + \frac{\rho}{N} H \cdot H^H \right) \right) \quad (1)$$

where  $N$  is the number of antennas at the transmitter, and  $\rho$  is the total transmit power divided by the noise power at the receive side.

It is well known that under fading conditions with statistically uncorrelated propagation channel, the channel capacity measured in bits per channel use scales (from an information theory point of view with fixed average transmit power) on average as

$$C_{MIMO} = C_{SISO} \cdot \min\{M, N\}, \quad (2)$$

where  $C_{SISO}$  is the channel capacity for (traditional) single transmit single receive antenna communication (Single Input Single Output), i.e.

$$C_{SISO} = \lg_2(1 + SNR_{SISO}), \quad (3)$$

where  $SNR_{SISO}$  is the SISO signal to noise ratio and  $C_{MIMO}$  is the resulting MIMO channel capacity. When  $M=N$  the channel capacity is  $N$  times the SISO channel capacity, i.e.

$$C_{MIMO} = N \cdot C_{SISO} \quad (4)$$

Note that SISO communication has a logarithmic relation for channel capacity with respect to SNR (see eq.(2)). The benefit from MIMO transmission with multiple data streams is that instead of using all power in one stream, multiple parallel streams are used with slightly lower SNR instead. In this way a capacity multiplication is obtained instead of a logarithmic increase in capacity.

So far, the discussion has been concerned with the case that the transmitter does not know anything about the channel matrix  $H$ . For the case when the transmitter has knowledge about the channel, performance can be further improved by transmitting data streams with different powers on the different modes of the channel. In addition, the channel knowledge can also be used to reduce the terminal complexity when demodulating and decoding the received signals.

An extensive overview of MIMO is found in A. Goldsmith, S. A. Jafar, N. Jindal, S. Vishwanath, "Capacity Limits of MIMO Channels", IEEE Journal on Selected Areas of Comm., VOL. 21, NO. 5, JUNE 2003.

One recent, alternative, way of handling communication in MIMO systems is opportunistic MIMO, which is also sometimes called multiuser diversity MIMO. The idea is that one may, for each of potentially many channels, send not all MIMO streams (hereafter called MIMO subchannels) to a single user, but instead to distribute the MIMO subchannels over several users. This can be accomplished in an opportunistic manner by selecting users based on Carrier to Interference Ratio (CIR) information fed back from the receiving users. In MIMO, CIR information is fed back for each MIMO subchannel. The more receivers present, the more likely it will be that one finds "good" channels, and this is guaranteed in a statistical sense. The opportunistic MIMO architecture is illustrated, for example, in W. Rhee, W. Yu and J.M. Cioffi: "Utilizing Multiuser Diversity for Multiple Antenna System," Proceedings of IEEE Wireless Communication and Networking Conference (WCNC), p 420-425, September 2000, Chicago, USA,

Opportunistic MIMO makes use of the fact that with a large number of users, it is likely that the MIMO channels may have realisations in which one or several MIMO streams may be received with high quality by one or more users despite the fact that no CSI is used to predict the signals at the transmitter. This is achieved even when using simple non-optimal demodulation methods such as zero-forcing. In the end, it is the base station that determines which MIMO subchannel to use for which user. In addition to zero-forcing, other well-known demodulation methods such as MMSE, Successive Interference Cancellation (SIC), Parallel Interference Cancellation (PIC), or other Multi user detection schemes (MUD) can be used.

Opportunistic MIMO is feasible in situations where a large number of users are involved and data is pending transmission to them. Performance in situations where only a few users are involved is lower.

**Object of the invention**

It is an object of the present invention to optimize the overall use of network resources in a multi-user, multi-antenna communication network.

**Summary of the invention**

- 5 This object is achieved according to the invention by a communication method for use in a communication network involving several user terminals communicating with at least one transmitting node, said transmitting node comprising a plurality of antennas, each of said user terminals comprising at least one antenna,
- 10 Said method being characterized by
- Selecting a first set of users comprising at least one user,
- Selecting a second set of users not comprised in the first set,
- Adapting communication parameters for the first set of users according to a first principle suitable for optimizing communication with the first set of users,
- 15 Adapting communication parameters for the second set of users according to a second principle which is different from the first principle, in response to communication parameters selected by the first set,
- Transmitting to the first set of user terminals according to the first communication parameters and to the second set of user terminals according to the second communication parameters.
- 20

- According to the invention, first an algorithm is applied to a first user, or group of users, that optimizes communication with that group of users. The first set of user is normally a small group of users relative to the total number of users. Then, whenever possible or desirable, communication is initiated with other users using a different optimization algorithm, or principle. In this way communication with one or a few users can be optimized while network resources can be used in an efficient way also for other users.
- 25

- 30 In a preferred embodiment the first principle involves optimization with respect to Channel State Information (CSI), for example with a Singular Value Decomposition



(SVD) of the channel matrix. Unitary beamforming matrices obtained from the SVD are then used in both the transmitter and the receiver to create a set of multiple orthogonal non-interfering MIMO subchannels. By adapting the transmitter and possibly the power allocation to different streams based on the CSI of one user, but then having the possibility to transmit the streams to other users the performance is improved as compared to transmitting the data to only the user for which the communication is optimized. The performance is always better than that offered by the SVD-MIMO method alone (i.e. when a single users link is optimized. For multiple user links that are optimized with respect to CSI, the aggregate performance is even better but traded against complexity increase).

An SVD of the channel matrix  $H$  is defined as follows:

$$U \cdot S \cdot V^* = SVD(H), \quad (5)$$

where  $U$  and  $V$  are unitary matrices,  $*$  is the Hermitian operator and  $S$  is a matrix with singular values ordered on the main diagonal. Assume now that  $M$  independent data streams are sent concurrently by multiplying each outgoing stream with a column of the matrix  $V$  at the transmitter and that the matrix  $U^*$  is used at the receiver. In this way, a number of parallel, non-interfering streams are created, and the resulting channel seen by each stream will then be the corresponding element of the diagonal matrix  $S$ . The optimum capacity can then be determined through applying the water-pouring theorem, which means that the transmit powers of each stream is selected as a function of the diagonal element in  $S$  and the receiver noise levels. It is, of course, also possible to use the same power on all streams, with only a small loss at high SNR.

This kind of transmission with an SVD optimizes the communication for a single user, but the SVD approach cannot be used directly for multiple receivers. Another drawback is that SVD based MIMO requires full CSI to be known at the transmitter. The CSI must consequently somehow be communicated to the transmitter. If a user

with slowly varying CSI is selected, as the first set of user according to the invention, the amount of CSI data is reduced, while users with fast varying channels only reports MIMO CIR information.

5 As explained above, SVD can be used to optimize communication with one single user. While opportunistic MIMO communication is particularly advantageous for communication with several users at a time. When these two algorithms are combined in the inventive way, the overall result is a more efficient use of network resources than with either one of the algorithms on its own.

10

Other methods can be used instead of SVD for precoding the transmission to the first set of users, such as other antenna weight parameters or a non-linear precoding, as described in, for example, Fischer, Windpassinger, Lamp, Huber, "Space-Time Transmission using Tomlinson Harashima precoding", Proceedings of 4. ITG Conference on Source and Channel Coding, Berlin, January 2002, p 139-147, adapted for the channels of the first set of users. For a single receiver with multiple antennas, or several users each having one antenna, zero forcing can be used. A so called QR factorization of the channel matrix can also be done. In this case, the unitary Q matrix can be used in the transmitter, possibly combined with some form of encoding to reduce the interference experienced by a receiver.

20

Suitable for use as the second principle is the algorithm referred to above as opportunistic MIMO communication, affected by transmit parameters used for the selected users. The communication parameters for the second group or users should in this case be adapted on the basis of a stream quality indicator, such as CIR.

25

The Opportunistic MIMO gain is evident already at merely two users present, while the real benefit in traditional opportunistic MIMO normally requires more users.

30

The amount of channel feedback remains low, and is nearly comparable with a single SVD-MIMO users feedback.

The first and second groups of users may be selected according to different criteria, for example, a combination of inputs involving, for example, traffic and quality of service parameters, CSI knowledge, and/or antenna configuration of the user terminals.

#### Acronyms

MIMO Multiple Input Multiple Output

MISO Multiple Input Single Output

10 SIMO Single Input Multiple Output

SISO Single Input Single Output

SVD Singular Value Decomposition

CSI Channel State Information

CA Channel Adaptation

15 LA Link Adaptation

MCS Modulation and Coding Scheme

OFDM Orthogonal Frequency Division Multiplexing

CIR Carrier to Interference Ratio

MMSE Minimum Mean Square Error

20 SIC Successive Interference Cancellation

PIC Parallel Interference Cancellation

MUD Multi User Detection

#### Brief Description of the Drawings

25 In the following, the invention will be described in more detail, with reference to the appended drawings, in which

Figure 1 shows a simple SVD based MIMO system involving one transmitter and one receiver;



Figure 2 shows a MIMO system involving one transmitter and four receivers, using opportunistic communication;

Figure 3 shows one configuration after scheduling MIMO subchannel resources to different users;

5 Figure 4 illustrates a first embodiment of a system in which SVD-based MIMO and opportunistic MIMO are combined;

Figure 5 illustrates a second embodiment of a system in which SVD-based MIMO and opportunistic MIMO are combined;

10 Figure 6 shows a simulation of average channel capacity as a function of the number of available receivers using SVD-based MIMO, opportunistic MIMO and a combination of the two, respectively;

Figure 7 shows an example of a protocol that may be used for the invention.

#### Detailed Description of Embodiments

15 Figure 1 illustrates basic MIMO communication between one transmitter 1 comprising four transmitter antennas TX1, TX2, TX3, TX4 and one receiver 3 comprising four receiver antennas RX1, RX2, RX3, RX4. An SVD is used to optimize the communication between the transmitter 1 and the receiver 3. A channel matrix  $H$  represents all the channels between the transmitter antennas and the receiver antennas.  $T = \{T1, T2, T3, T4\}$  is a vector of the transmitted streams which are weighted by the beamforming matrix  $V$  obtained from a decomposition of  $H$ , and then transmitted from the antennas TX1, TX2, TX3, TX4.  $R = \{R1, R2, R3, R4\}$  is a vector of the reconstructed signal obtained after applying a unitary signal received at the receiver antennas RX1, RX2, RX3, RX4 and  $N = \{N1, N2, N3, N4\}$  is a vector with

20 Gaussian Noise added to the received signal vector  $R$  at the receiver antennas RX1, RX2, RX3 and RX4, respectively. As can be seen, each of the receiver antennas RX1, RX2, RX3, RX4 receives signals from all the transmitter antennas TX1, TX2, TX3, TX4. CSI information is transmitted from the receiver 3 to the transmitter 1 on a feedback channel 5 shown as a dashed line.  $U$  and  $V$  are the unitary matrices determined from the SVD of channel matrix  $H$  (see eq. (5)).

30

Figure 2 illustrates an opportunistic MIMO architecture. It should be noted that each terminal may be equipped with an arbitrary number of antennas. One transmitter T2 comprising four transmitter antennas TX21-TX24 transmits data to four receivers R21, R22, R23, R24. The first and the fourth receivers R21, R24 have four receiver antennas each, the second receiver R22 has three receiver antennas and the third receiver R23 has one receiver antenna. Feedback channels 7 from each receiver to a control and scheduling unit 9 in the transmitter are shown as a dashed lines. The feedback channels 7 are used for transmission parameters such as link adaptation and scheduling data for use by the transmitter. A number of buffers (not shown) comprise the information to be transmitted to the receivers.

The control and scheduling unit 9 selects the buffer from which to transmit at any given time, and whom to send to, based on feedback data. It also selects the MCS to use for the transmission. The control and scheduling unit 9 can also take into account quality of service parameters, such as the maximum delay time for a data packet, fairness requirements, etc. The weight matrices  $W_{21} - W_{24}$  are used to adjust the reception at the respective receiver. In this case, the control and scheduling unit is arranged to identify receivers to which a good transmission quality is possible at any given time.

Figure 3 shows a cellular system comprising a transmitter, in this case a base station 11 communicating with a number of user terminals 13, 15 using multi-user MIMO, for example, opportunistic. Figure 3 shows the situation after scheduling MIMO subchannel resources to different users 13 that have provided CIR feedback to the base station at one instance. With other users 15 there is no current communication. In subsequent instances, the traffic flow configuration may/will change in response to channel variations. Also, some users may not receive any data, as their CIR conditions are unfavourable or simply because there is no data to send to them.

Figures 4 and 5 show an overview of the basic idea, where one transmitter and in total  $K$  receiving users are available.

In Figure 4, the transmitter T4 has selected to optimize the transmission to the first receiver R41 using an SVD. For each of the receivers, a channel matrix  $H_k$  applies,  $k$  being the number of the receiver. In particular the first receiver R41 employs a weight matrix  $U_{41}$  that is the unitary matrix derived from the SVD of channel  $H_{41}$ , whereas the transmitter uses the unitary SVD matrix  $V_4$ , similarly derived from channel  $H_{41}$ . On a feedback channel 17, shown as a dashed line from the first receiver R41 to the transmitter T4, CSI information which is needed for SVD-based MIMO is transmitted to the weighting block  $V_4$  in the transmitter. Alternatively another method can be used for precoding the transmission to the first receiver, such as other antenna weight parameters or a non-linear precoding adapted for user one's channel. To the remaining users R42,...,R4K, opportunistic communication is used. From each of the remaining users R42,...,R4K a feedback channel 19 transmits MIMO CIR feedback to the control and scheduling unit 9'.

In this embodiment, the control and scheduling unit 9' comprises a pre-processing unit 91 arranged to receive the CSI information transmitted on the feedback channel 17, pre-process it if applicable and forward it to the weighting block  $V_4$ . The control unit will, based on input from other units, taking into account e.g. QoS requirements, buffer status and prioritization criteria, in addition to possible CSI feedback and channel properties such as speed determine which receivers that are to signal CSI and at what time. The preprocessing unit 91 is then arranged to receive the CSI on the feedback channels from the receivers and optimize the weighting used in the weighting block  $V_4$ .

The control and scheduling unit 9' also comprises a CQI information unit 93 arranged to receive channel quality information from all users and control the transmission from the buffers to the receivers not included in the first subset.

In the transmitter T4 a number of buffers in a buffer unit B4 comprise the information to be transmitted to the receivers.

5 The control and scheduling unit 9' selects whom to send data to at any given time based on feedback and selects the corresponding buffer from which the data is taken. It also selects the MCS to use for the transmission. The control and scheduling unit 9' can also take into account quality of service parameters, such as the maximum delay time for a data packet, fairness requirements, etc.

10 One or more other units 95 may be included as well, for providing information to the control and scheduling unit 9' for use when controlling the communication. This information may be, for example, quality of service information and/or terminal information. The control and scheduling unit 9' can also receive queue information  
15 from the buffers.

In Figure 5 the transmitter has decided that transmission parameters (meaning e.g. antenna weights and transmit power) should be adapted to the channel state to a first subset of users consisting of the first and the second receiving users R51, R52,  
20 whereas the remaining users R53,...,R5K operate in opportunistic mode, under the constraint that overall transmission is optimized for the first subset of users. CSI information from the users R51 and R52 in the first subset is transmitted on respective feedback channels 21, 22 to the V matrix V5 in the transmitter T5. From the other users R53,...,R5K only feedback regarding the stream quality is needed on respective feedback channels 23, 24.  
25

In this case, a normal SVD of each channel to the users R51 and R52 in general cannot be used directly to determine transmit and receiver matrices. However, based on the channels H51 and H52, the transmitter may use a weight matrix  $Y_{1,2}$  and the  
30 user one and two user weight matrixes X51 and X51. Those weight matrices may be

optimized to maximize the aggregate capacity on both links (or more if more than two users are considered for the CSI adapted transmission) or other criteria may be applied involving maximizing the capacity with fairness constraints.

5 The buffers and control and scheduling unit of Figure 5 are similar to those of Figure 4, except that in Figure 5 two users are included in the first subset of users.

The user (or users) for which the transmission(s) is (are) optimized, can be selected in several ways. The transmitter can use a combination of inputs involving, traffic and QoS parameters knowledge, CSI knowledge, antenna configuration knowledge  
10 of user terminals, decoding capability knowledge of user terminals. With respect to QoS, it may be appropriate to adapt transmission parameters to the user with the most stringent traffic requirements, for instance carrying real time voice or video traffic, whereas less stringent QoS requirement such as best effort may be supported  
15 by the opportunistic communication links. The selection may also be based on channel parameters, such as average path gain. It may be feasible to adapt to a user with poor reception quality to start with due to high path loss. The users with lower path loss (or better average SNR) can then employ opportunistic communication. Adapting to a user with a single or few antennas, can be advantageous, since other  
20 users terminals with potentially more antennas have greater possibility to exploit opportunistic MIMO. Also if the decoding capabilities are known not to be the best among a set of user terminals, then it may be wise to select the poorly operating user terminal, since other users terminals may still be able to operate well and decode signals transmitted with the opportunistic approach. Alternatively, users with chan-  
25 nels with long coherence time can be selected. For such users CSI update rates can be fairly slow which is beneficial since the CSI generally carries more information than simply reporting CIR for MIMO subchannels. Lastly, various fairness criteria's may be weight in to ensure that all, or near all, users are selected in such way that

~~the transmit parameters are optimized for their channel. An example of such ap-~~



proach can be to employ a Round Robin method, where every user is selected on a regular basis.

It should be noted that everything that has been discussed so far applies to a single channel or a single subcarrier, such as in OFDM. It is therefore possible to use one set of choice, e.g. a selected SVD-MIMO user, on one set of subcarriers and another selected user on another subcarrier. This flexibility can be used in different ways to improve performance. For instance, users with certain MIMO capabilities may use certain part of channels, such as OFDM subcarriers.

Figure 6 shows the result of a simulation of the channel capacity in a MIMO system as a function of the number of available users. Three different principles are shown: only SVD-based communication, only opportunistic communication and the inventive algorithm combining the two. As can be seen, for one user the combined algorithm is equal to SVD only. At any number of users higher than one, the combined algorithm provides a higher channel capacity. If only opportunistic communication is used the performance in this example is lower than SVD up to a certain number of users and improves as the number of users increases, but it is always lower than for the combined algorithm.

Figure 7 shows one possible, but not the only, protocol implementation for use in the invention. A base station BS is communicating with a number of mobile stations  $MS_1, MS_2, \dots, MS_K$ .  $MS_1$  has been selected for the SVD optimization. For the remaining mobile stations  $MS_2, \dots, MS_K$ , opportunistic MIMO is used. Hence, at time  $n$ ,  $MS_1$  sends CSI feedback information to the BS, indicated by a diagonally shaded box. The feedback information sets the MIMO-antenna weight matrix to a channel matrix  $V_1$ . In the following time slots CSI information is transmitted. The first transmission, i.e. at time  $n+1$ , from the BS is destined to  $MS_1$  (instead of sending data, a channel estimation symbol may be sent which pass through the  $V_1$  matrix). At time  $n+1$ , the other MSs can determine their respective MIMO-CIR quality.

and feed it back to the BS (indicated as grey boxes). Also,  $MS_1$  feeds back an update of the CSI. At time  $n+2$ , the BS determines which user or users to send to. That decision is based on the CSI for  $MS_1$  and the MIMO-CIR quality for the other MSs. This procedure is repeated for subsequent time instances, until it is determined to select another user for optimized communication. In Figure 6, this happens at slot  $n+m-1$ , where  $MS_K$  starts reporting CSI information, that is, average and/or instantaneous knowledge of the channel and interference, to the BS (diagonally shaded or white boxes) and the other report MIMO-CIR information (indicated by grey or vertically shaded boxes).

## Claims

1. A communication method for use in a communication network involving several user terminals communicating with at least one transmitter node, said transmitter node comprising a plurality of antennas, each of said user terminals comprising at least one antenna,

Said method being characterized by

Selecting a first set of user terminals comprising at least one user terminal

Selecting a second set of user terminals not comprised in the first set

Adapting first communication parameters for the first set of user terminals according to a first principle suitable for optimizing communication with the first set of

user terminals,

Adapting second communication parameters for the second set of user terminals according to a second principle which is different from the first principle, in response to communication parameters selected by the first set,

Transmitting to the first set of user terminals according to the first communication parameters and to the second set of user terminals according to the second communication parameters.

2. Method according to claim 1, wherein the first principle involves optimization with respect to Channel State Information (CSI), such as average and instantaneous knowledge about the channel and the interference, for example by Singular Value Decomposition (SVD).

3. Method according to claim 1 or 2, wherein the second principle makes use of the algorithm opportunistic MIMO communication.

4. A method according to any one of the preceding claims wherein the first set of parameters is related to the transmit power and the beamforming matrix (V) at the transmitter side.

5. A method according to any one of the preceding claims, comprising the step of selecting the first set of user terminals in dependence of traffic and quality of service parameters.

5 6. A method according to any one of the preceding claims, comprising the step of selecting the first set of user terminals in dependence of CSI knowledge.

..... 7. A method according to any one of the preceding claims, comprising the step of  
10 selecting the first set of user terminals in dependence of receiver antenna configuration.

8. A transmitter node for use in a MIMO based communication network involving several user terminals communicating with the transmitter node, wherein each of said user terminals comprises at least one antenna, said transmitter node comprising  
15 a plurality of transmit antennas arranged to transmit information to a plurality of receiver nodes, said transmitter node comprising:

Selection means for selecting a first set of user terminals comprising at least one user terminal and a second set of user terminals not comprised in the first set

First adaptation means for adapting first communication parameters for the first set  
20 of user terminals according to a first principle suitable for optimizing communication with the first set of user terminals,

Second adaptation means for adapting second communication parameters for the second set of user terminals according to a second principle which is different from the first principle, in response to communication parameters selected by the first set,

25 Transmit means for transmitting to the first set of user terminals according to the first communication parameters and to the second set of user terminals according to the second communication parameters.

## ABSTRACT

Communication in a MIMO network is optimized by selecting a first set of users comprising at least one user, selecting a second set of users not comprised in the first set, adapting communication parameters for the first set of users according to a first principle suitable, e.g. SVD, adapting communication parameters for the second set of users according to a second principle, e.g. opportunistic MIMO, and transmitting to the first set of user terminals according to the first communication parameters and to the second set of user terminals according to the second communication parameters. . In this way communication with one or a few users can be optimized while network resources can be used in an efficient way also for other users.



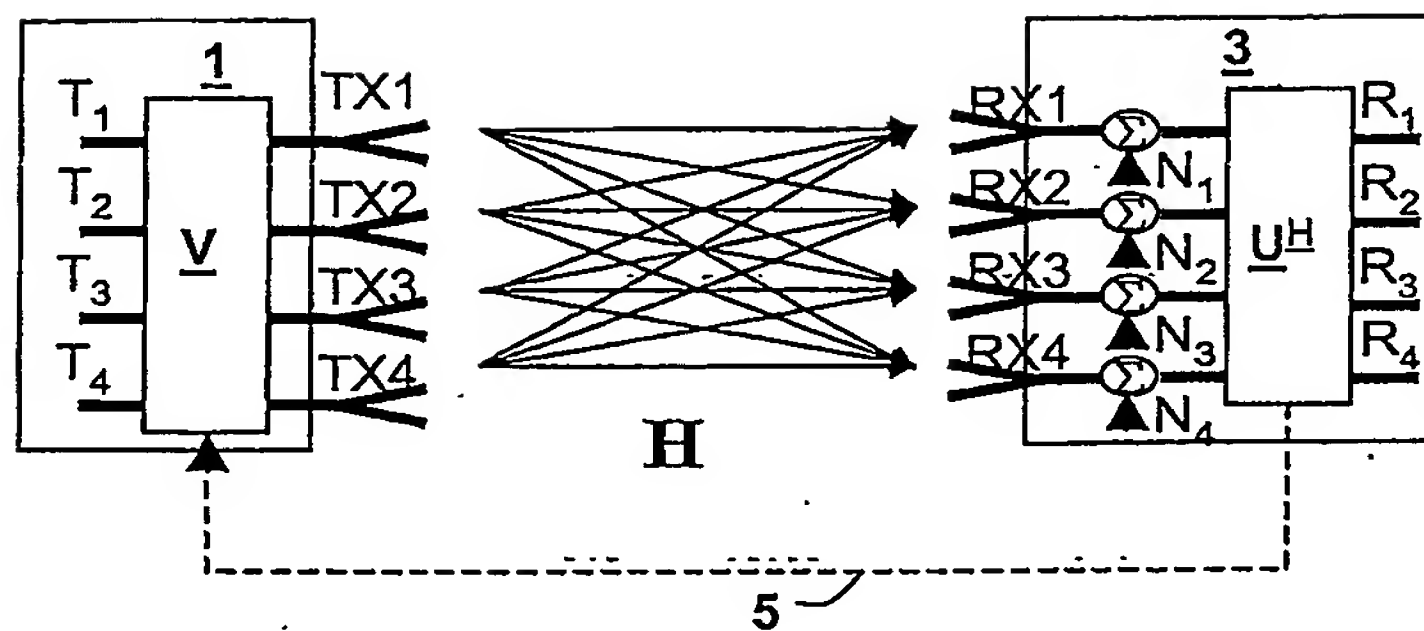


Fig. 1 Prior art

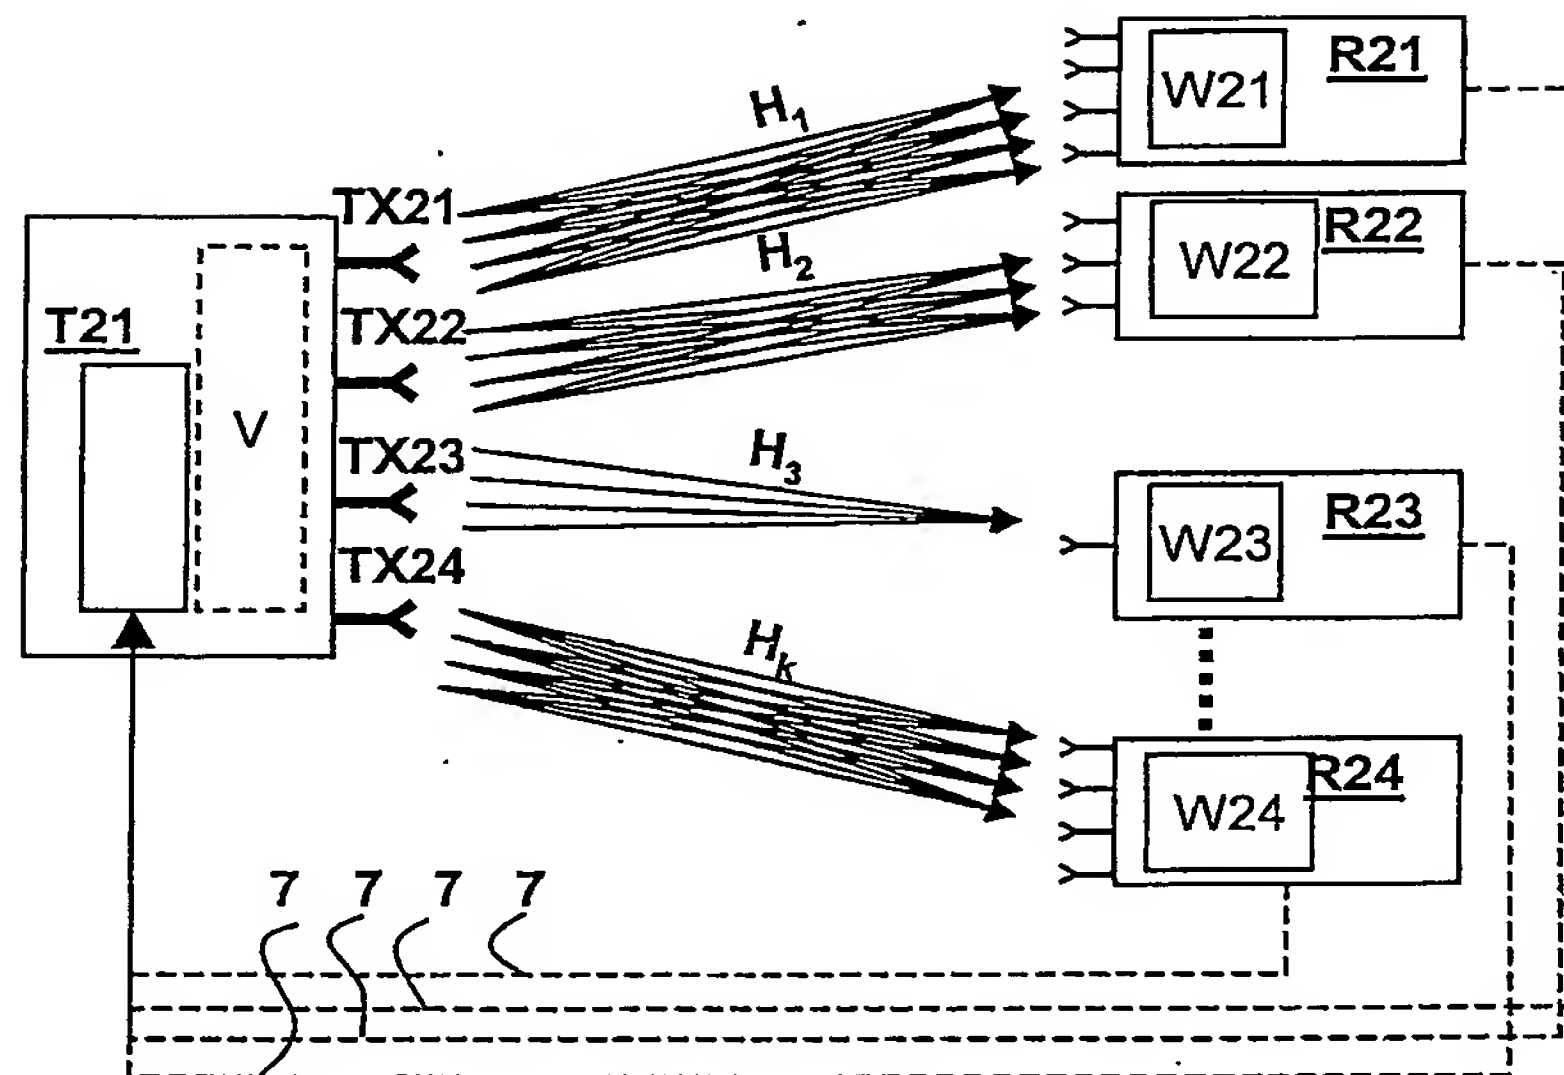


Fig. 2 Prior art

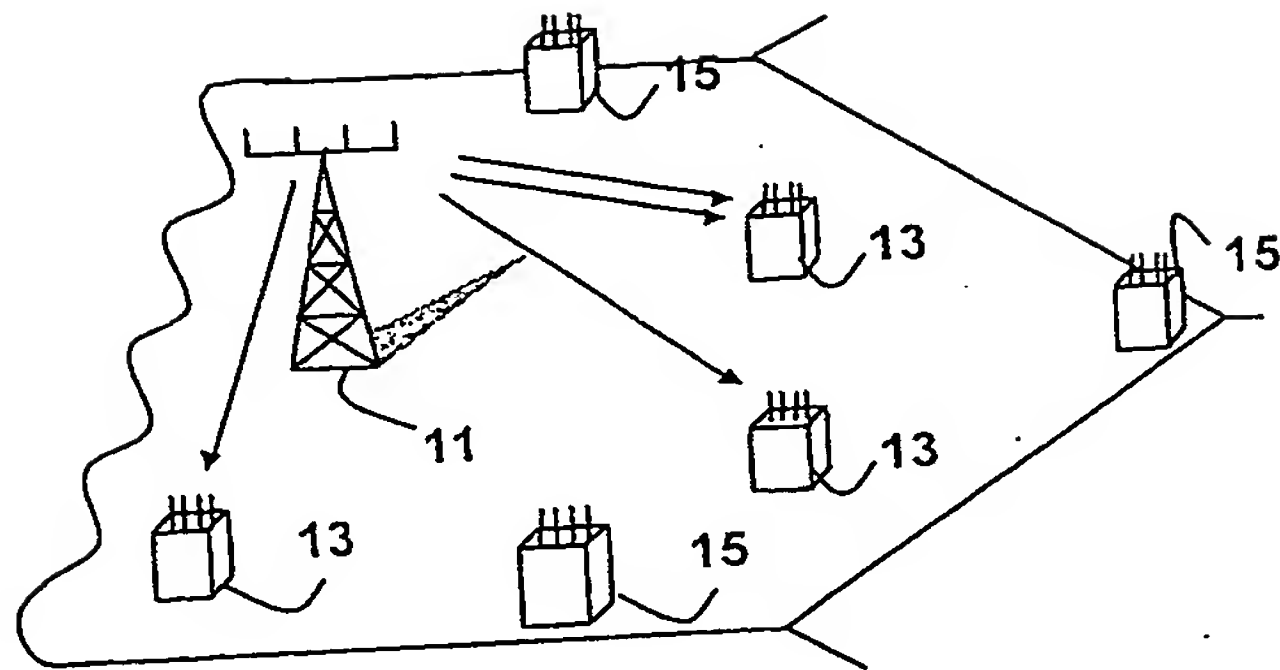


Fig. 3

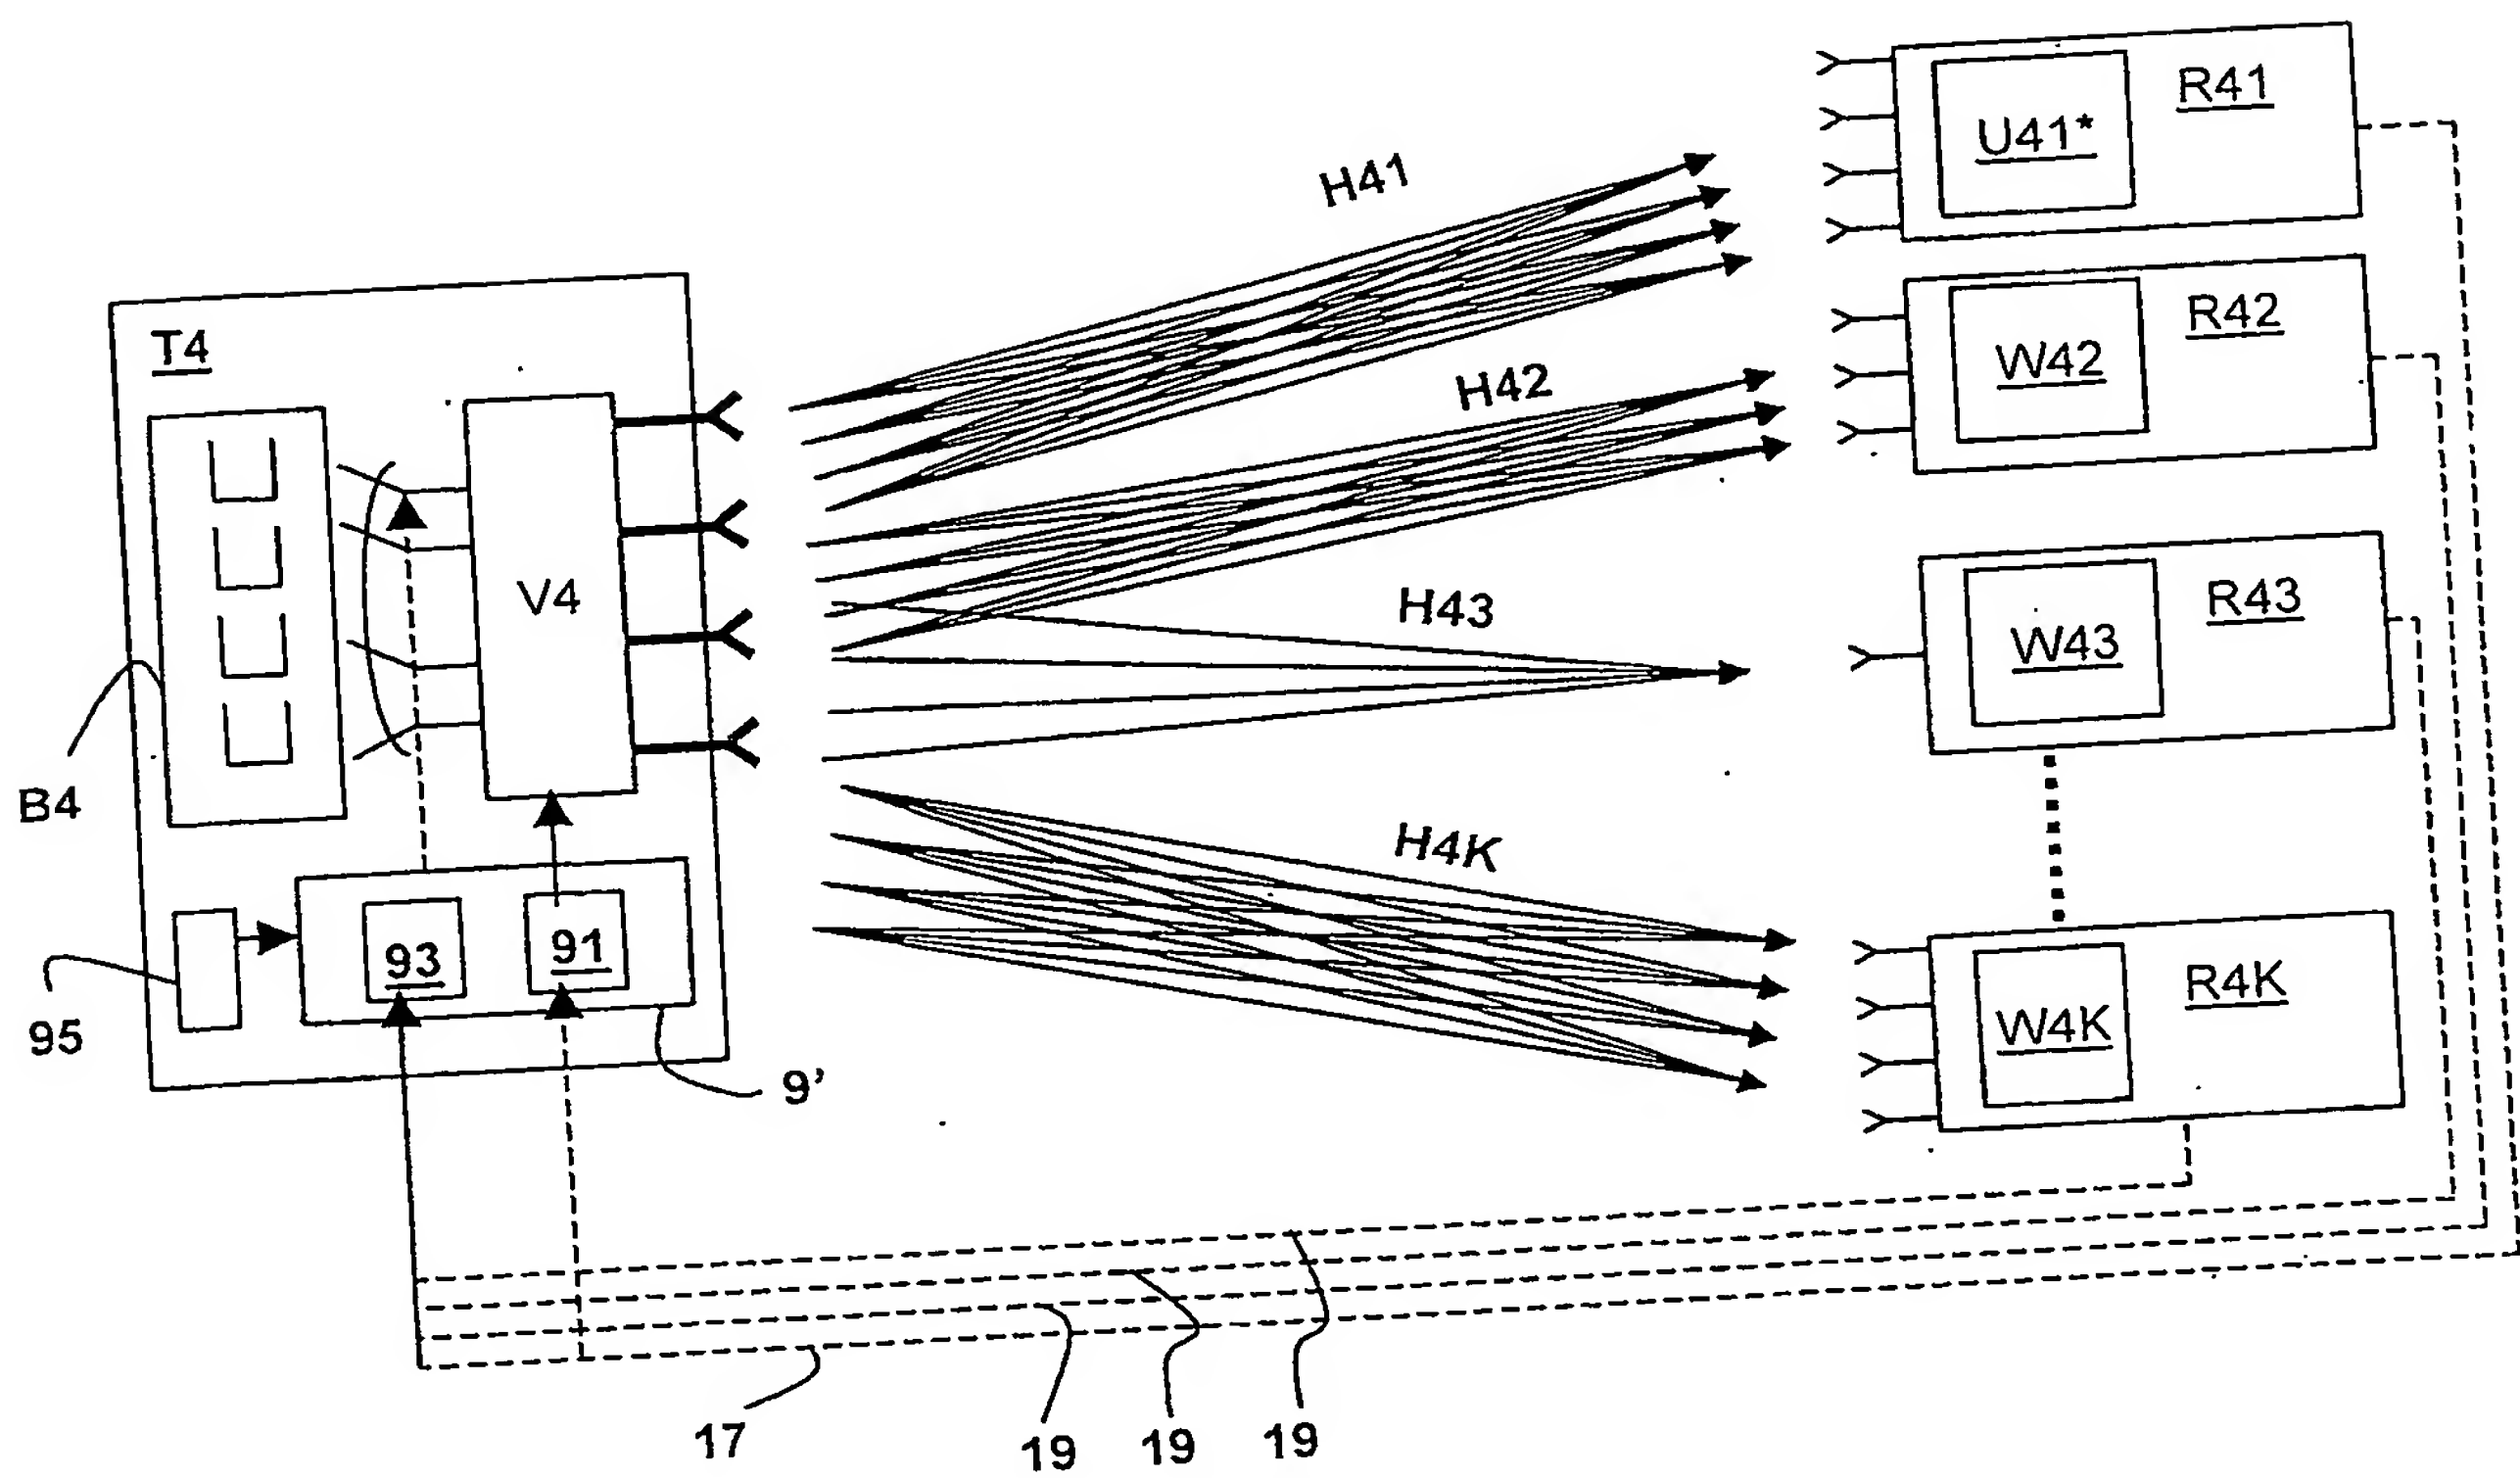


Fig. 4

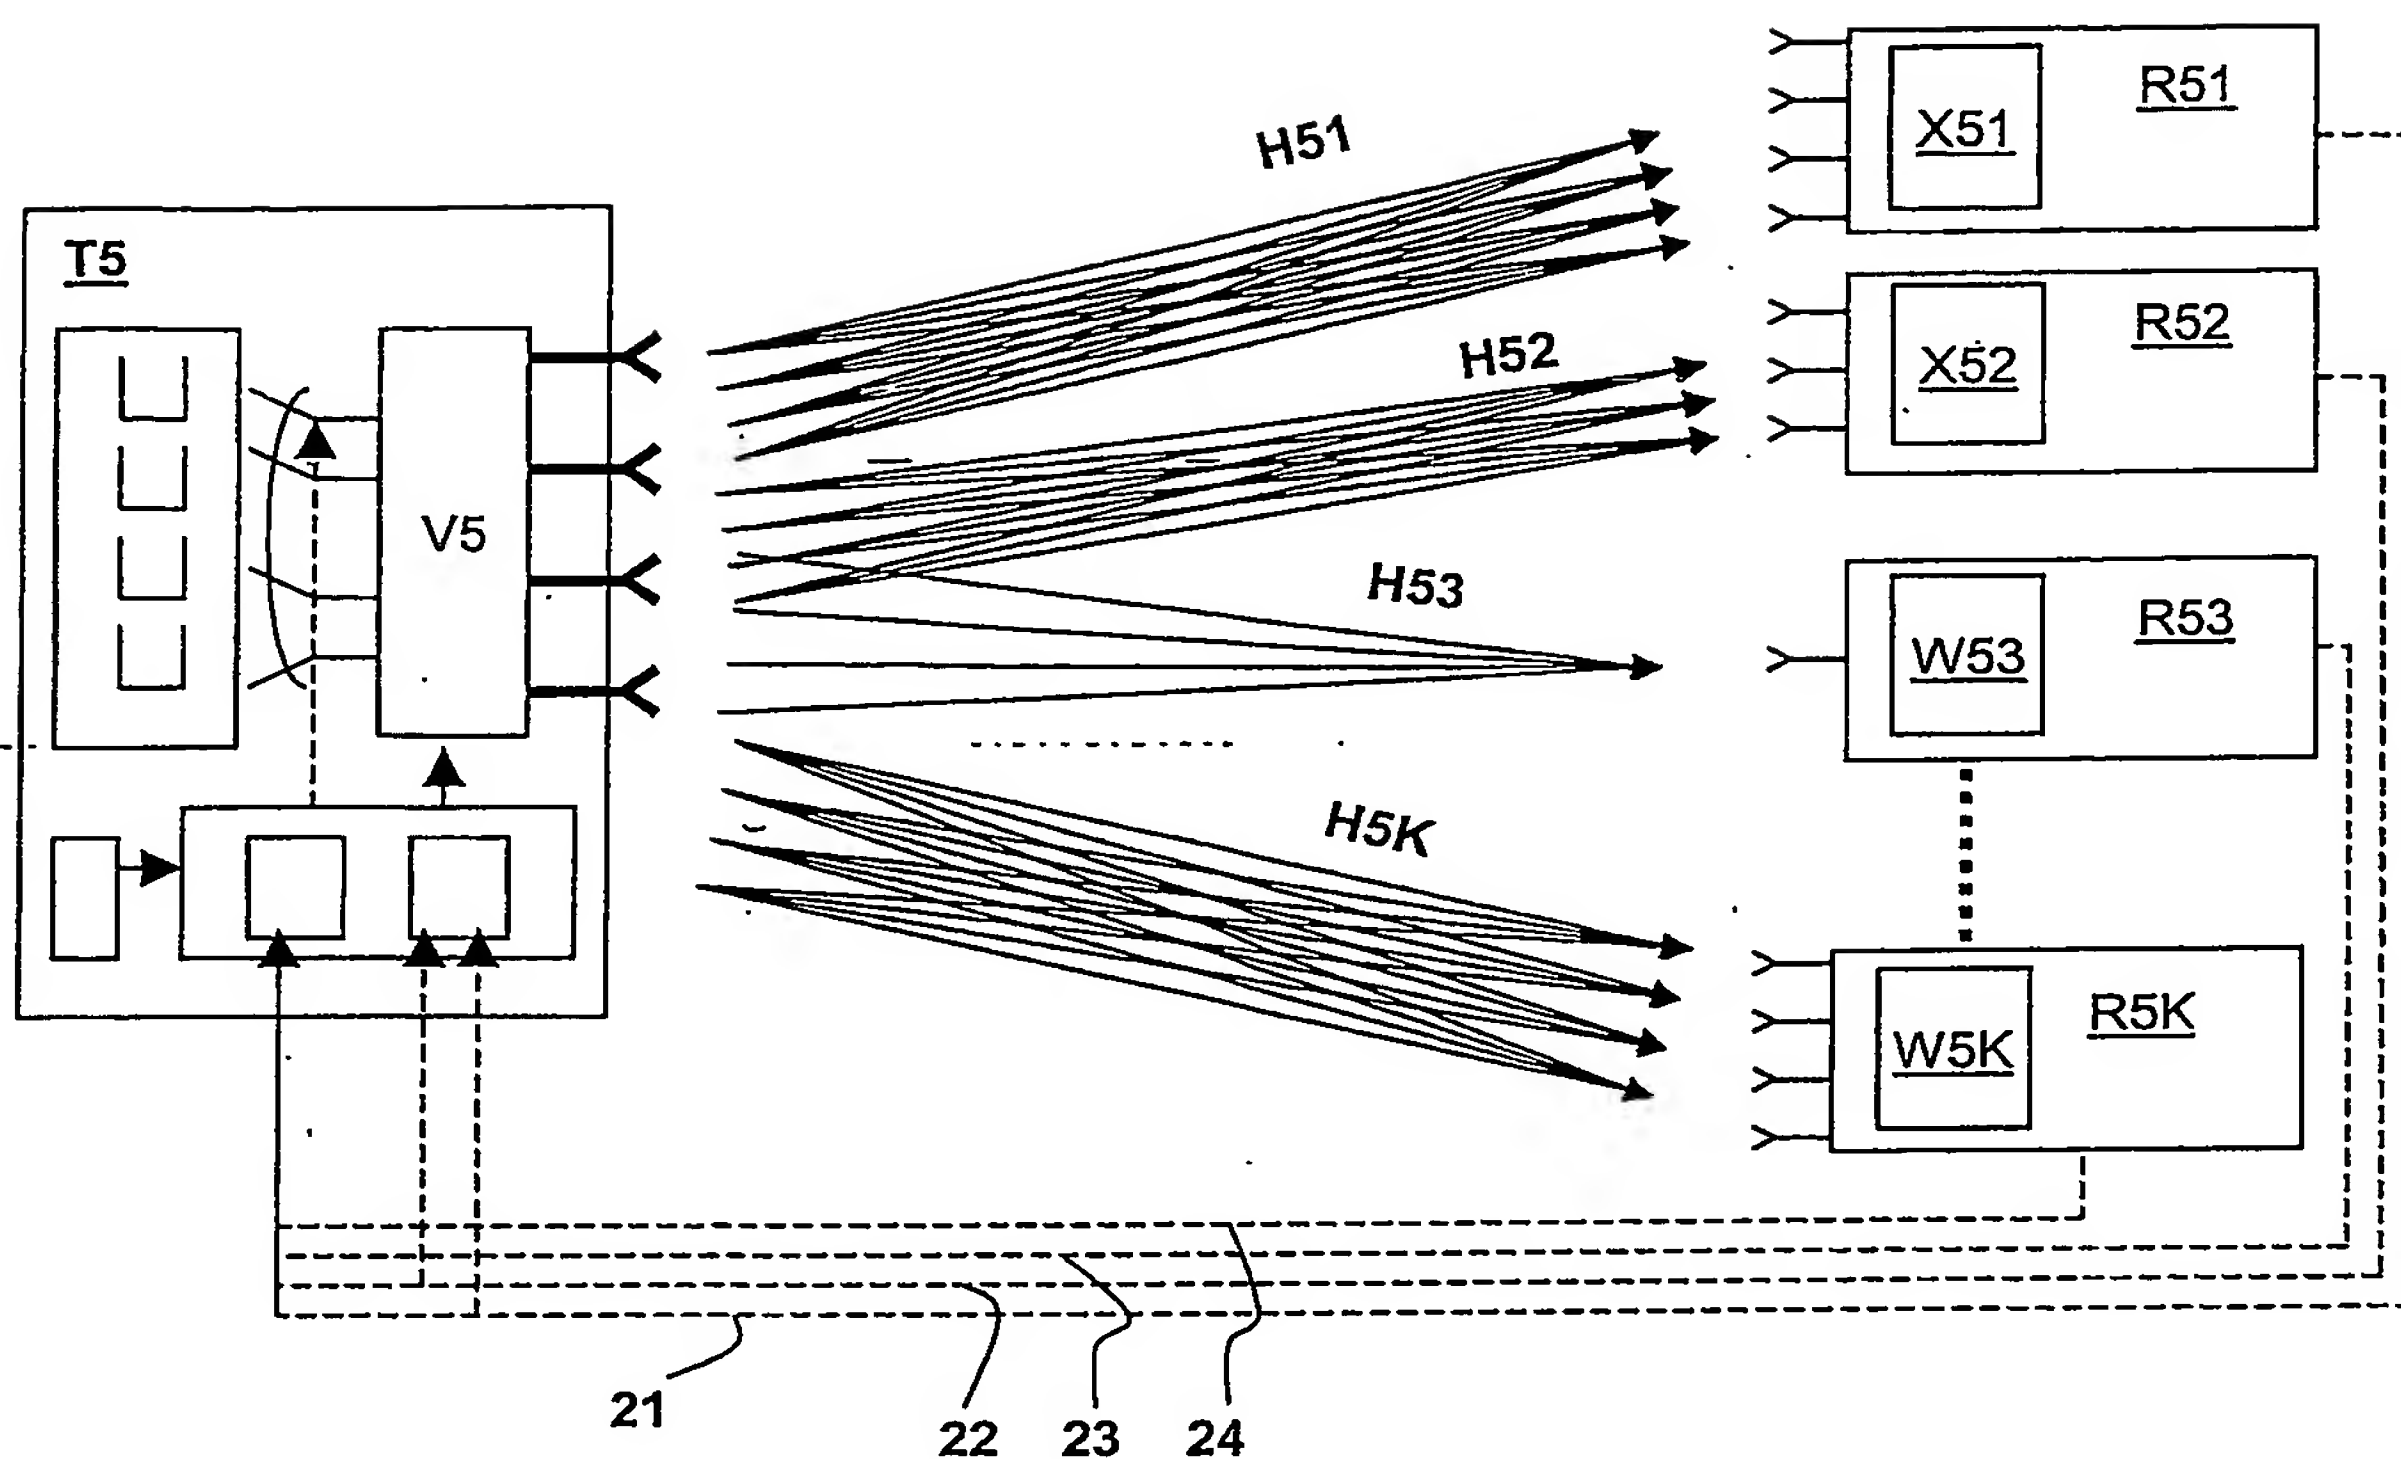


Fig. 5

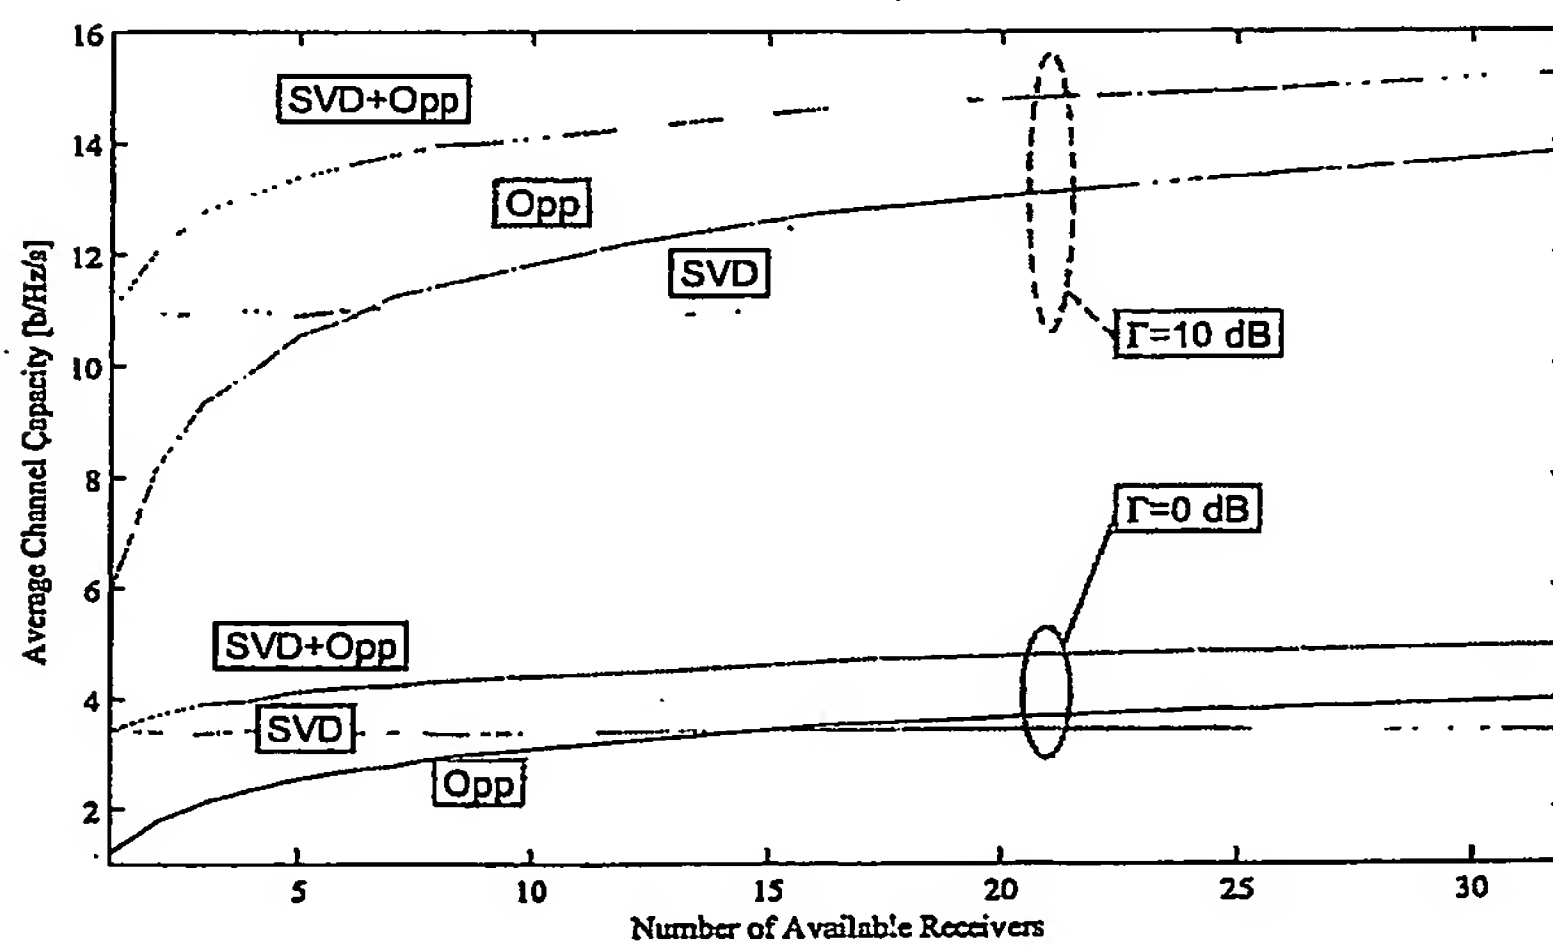


Fig. 6

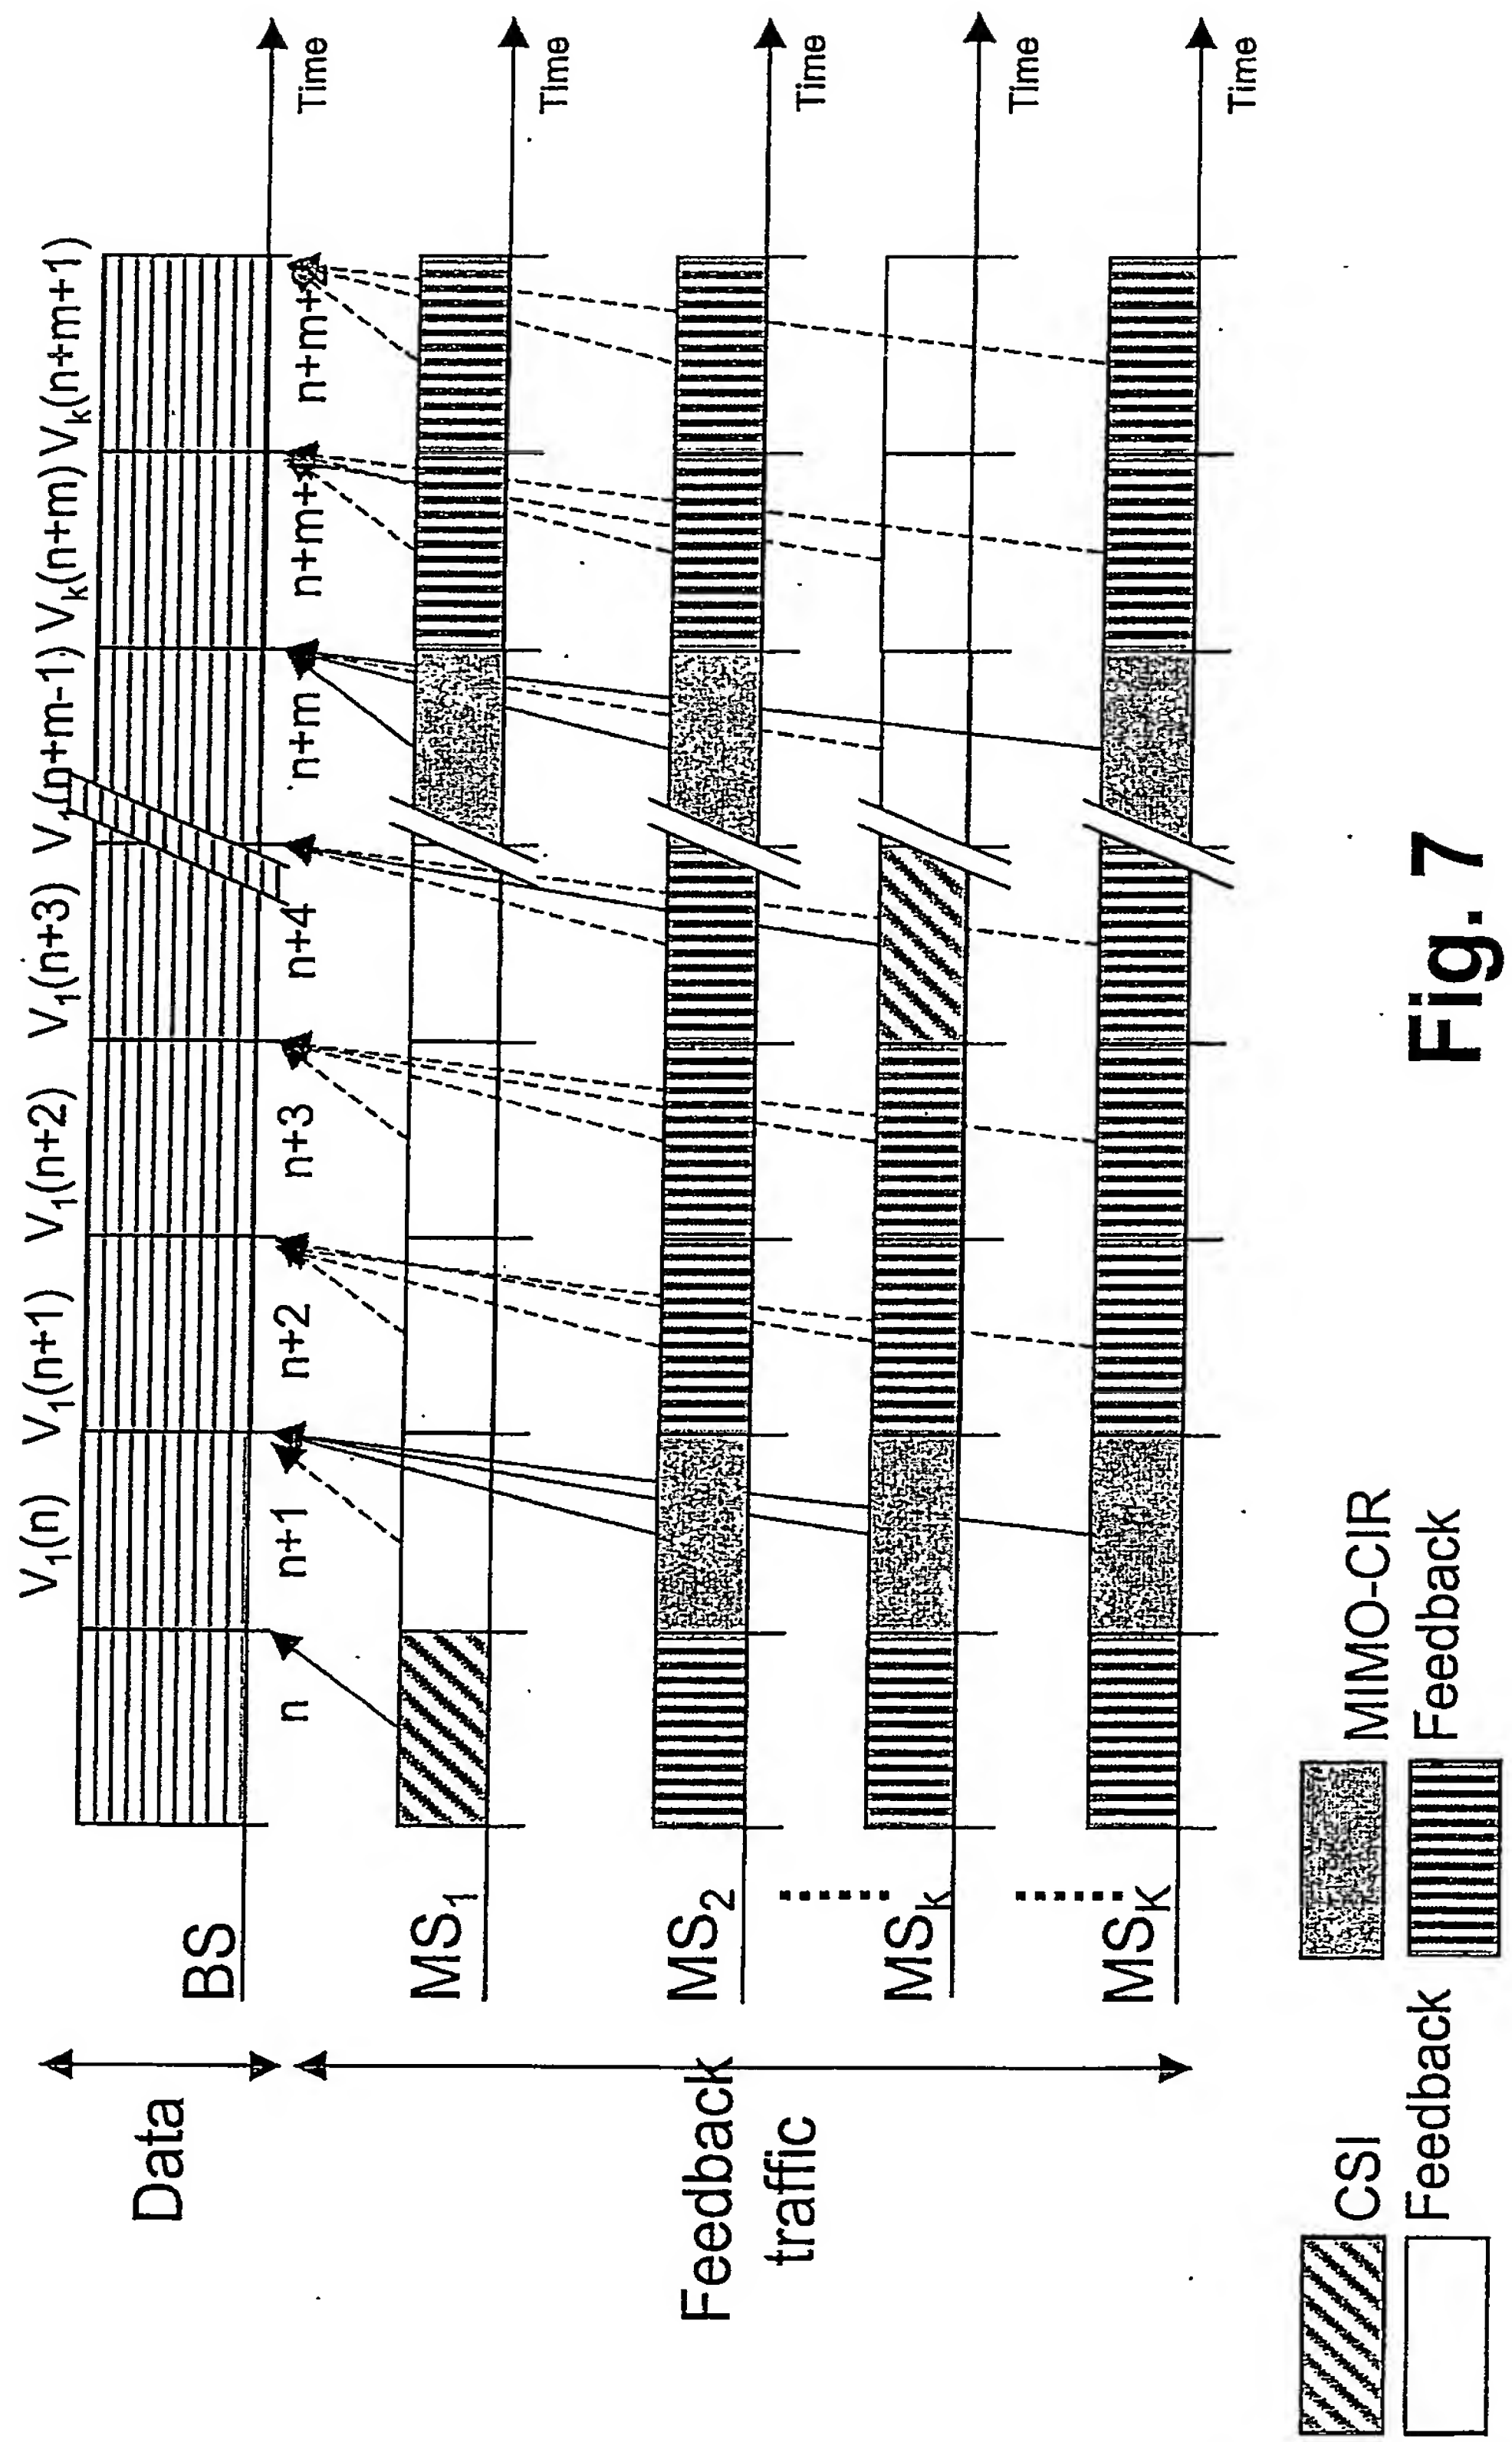


Fig. 7